

The *ULTIMATE* in personnel and property protection!



A keypad with green LED backlight allows for easy reading in any light. Two different gas sensor channels can be the same gas (two locations) or any two of chlorine, sulfur dioxide, ammonia.


The SUPERIOR™ Gas Detector is designed for use in many applications.

Wastewater treatment plants • Water purification plants • Swimming pools
Cooling towers - Air scrubbers • Food and beverage processing • Chemical processing



SCAN this QR code for more information!

GAS DETECTOR - Model SLD-1 & SLD-2

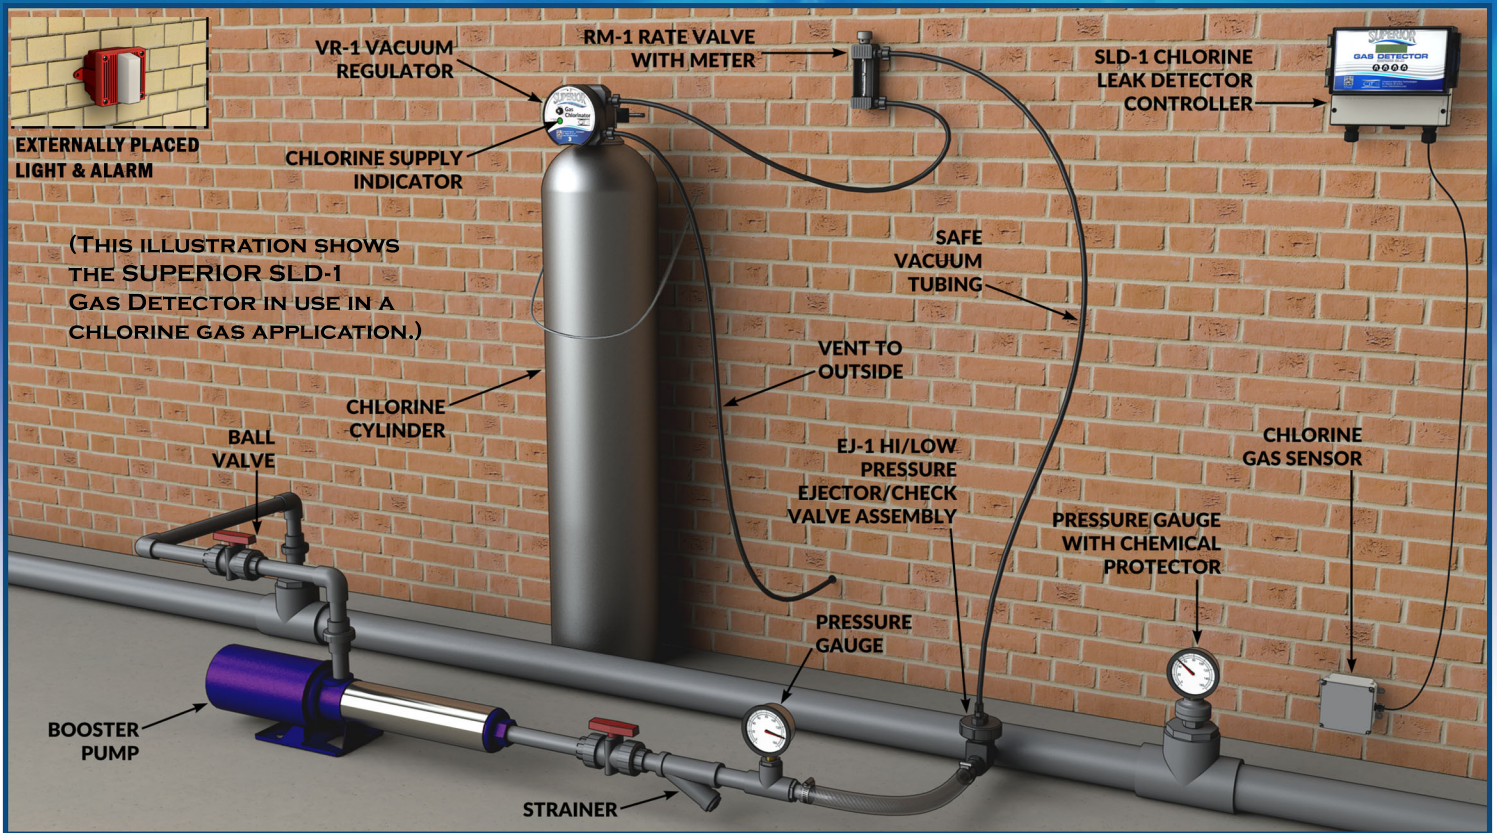

The unit can be placed where it is most convenient for the operator, up to 1,000 feet (305 meters) away from sensors in a monitored environment. Now available with optional, extended life, 3000mAh battery backup.

STANDARD FEATURES INCLUDE:

- ◆ User-friendly key pad interface with functions indicated by individual menu display screens.
- ◆ 16-character by 2-line display, with a green LED back light for easy reading, even in low light areas.
- ◆ NEMA-4X controller enclosure.
- ◆ 95dB internally mounted alarm.
- ◆ Event alarm log records up to 356 events, with time and date, which can be viewed on the display or downloaded from the optional serial port.
- ◆ 4-20mA gas level monitor output.
- ◆ Sensor life and calibration reminder timers.
- ◆ Password protection for all parameter settings.
- ◆ High, Low, Latching and Non-Latching alarm relays.
- ◆ Two level alarm settings for "Warning" and "Danger" gas levels. OSHA Compliant.
- ◆ All alarm relays are user adjustable for N/O, N/C, Latch or Non-Latch.
- ◆ Flashing backlight screen when alarm acknowledgment is required.