



VAS-4 ALARM SWITCH

Model VAS-4



Now with Universal
120/220V Power Supply


The SUPERIOR™ Vacuum Alarm Switch keeps your team aware.

SUPERIOR™ Series VAS-4 chlorine vacuum alarm switches are designed to alert gas chlorinator users when supply has been interrupted and in the event of a leak. Operations personnel want a quick, reliable monitoring device to tell them if the critical chlorinating process has been interrupted.

SCAN this QR code for more information!



VAS-4 Typical Installation

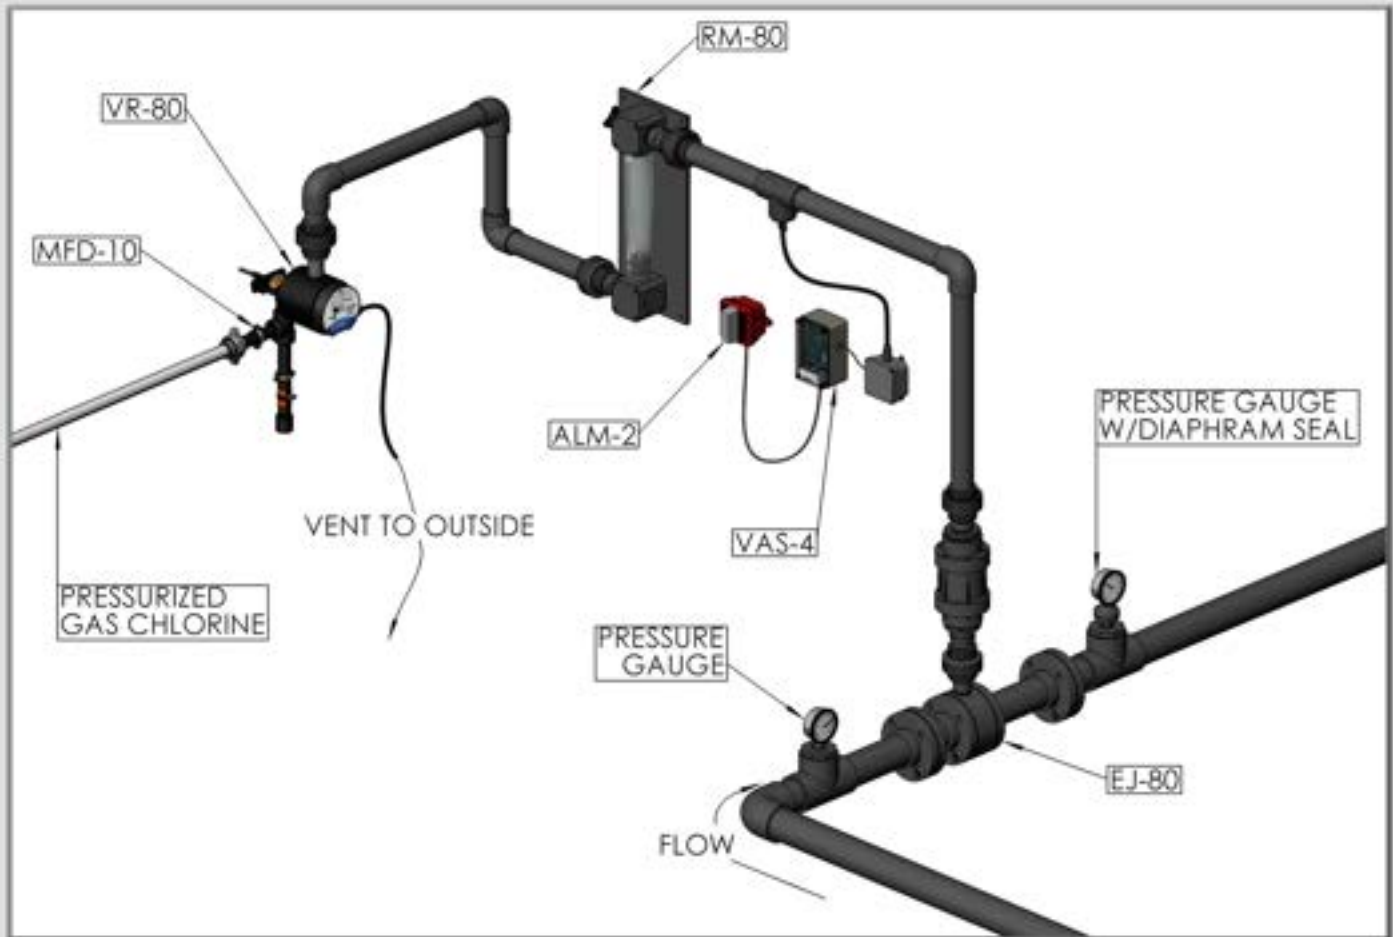

SPECIFICATIONS

Enclosure: fiberglass NEMA 4X

Power: 115VAC, 60 Hz

(220VAC, 50Hz available)

Alarm relays:

NO\NC Type

240V AC @ 5 amps resistive

115V AC @ 5 amps general use

30V DC @ 5 amps general use

Analog Output:

voltage: 0 to 3 VDC

current: 0 to 3 ma DC

Reset switch: IP 65 protection.

Light and Horn addons are also available.

External connectors:

IP 68 protection.

Indicators:

vacuum: 3 digit digital LED display.
alarms: 3 LED indicators/HIGH, Low, and Latch.

Polarity:

1 LED indicator for pressure.

Temperature range (system):

Storage: -30 C to 70 C.

Operating: -20 C to 50 C.

Vacuum temperature range: -40 C to 50 C.